



### - EK PERFECT FINISH —



# About

Wonder Wall Putty is crafted from premium raw materials sourced from the renowned mines of Morwad, Rajasthan, combined with special polymers and white cement.

Our product guarantees "**Ek Perfect Finish,**" delivering a flawless, protective base coat for paints on both internal and external surfaces. Experience unparalleled quality, ensuring smooth, white walls with "Wonder Wall Putty".



How is Wonder Wall Putty Different?

Wonder Wall Putty distinguishes itself from standard putty by ensuring unparalleled ultra-whiteness, delivering a lasting aesthetic appeal to walls. Moreover, it provides robust protection against potential issues such as flaking, blistering, and the growth of algae and fungus, ensuring the longevity and pristine appearance of painted surfaces over the years.

Why Should You Choose Wonder Wall Putty?





**PAGE - 2** 

### **Superior Whiteness**

Wonder Wall Putty aims to deliver a flawless finish to walls and ceilings, ensuring the true shade of the paintProvides true tone of paint.

### **High Coverage**

It claims to enhance paint coverage, potentially reducing overall costs.

### **Smooth Finish**

The putty provides a premium finish that is reflective to sun-rays, contributing to the protection of walls.

### WONDER WALL PUTTY

# **Benefits**

**Cementitious Material:** 

It boasts higher adhesive strength, providing a durable base coat for paint and distemper applications.


The fine material allows for saving in putty consumption while maintaining an elegant appearance. Absolute Fineness

Algae and Fungus Resistant The putty is designed to resist algae and fungus, preventing discoloration of walls and contributing to a healthy home environment.

The water-resistant feature helps maintain the aesthetic appearance of painted surfaces.

Water Resistant

# **Simple Application Instruction**

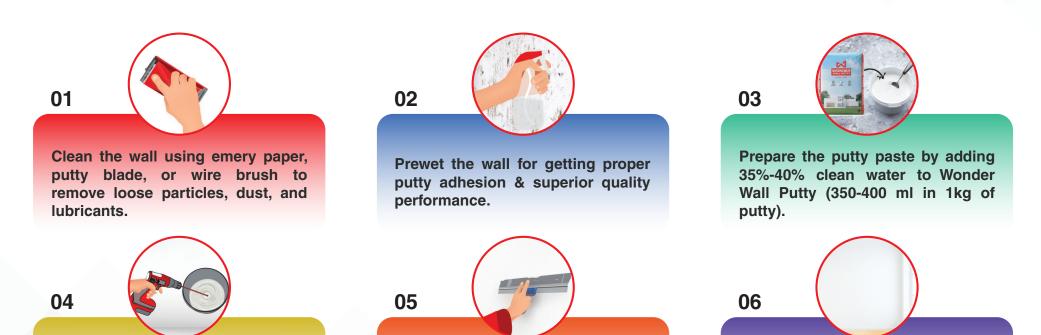



Thoroughly mix the putty and water with a putty mixing machine. Allow it to stand for 5-10 minutes, then re-stir for a homogeneous paste.



Apply the first coat of Wonder Wall Putty with a putty blade and let it dry for at least 3-4 hours or as required. Apply the second coat only after the first coat is completely dried.



Scrub the wall with emery paper of 500+ no. to remove putty blade marks if necessary.

# Your wall is now ready to rock the paint!

# **Precautions**

- It should be kept away from the reach of children
- In case of ingestion, immediate medical attention is advised.
- If irritation develops or persists, the affected skin should be washed immediately with plenty of water, and immediate medical assistance should be sought.

### WONDER WALL PUTTY PAGE - 3

The company offers technical support through a team of technocrats/engineers. They provide training for applicators to ensure the best quality application and results. The team is also available for on-site sampling of the product and addressing any queries.

# Recommended **Areas of Application**

**Internal Walls** 






**Bedroom** 

Hall Area

**Special Area** 

#### **External Walls**







Parking Lot

Lift Shaft

## **Technical Specifications**

Properties	Units	Specifications	Test Results	Test Methods			
Tensile Adhesion Strength							
14 Days	N/mm2	≥ 1.0	1.1	EN 1348			
Setting Time							

Initial	Minutes	≥ 180	280	EN 196			
Final	Minutes	≤ 500	310	EN 196			
Compressive Strength							
28 Days	N/mm2	≥ 5.0	5.2	EN 1015-11			
Water Capillary Absorption, 30 minutes							
14 Days	ml	≤ 0.4	0.2	Karsten Tube			
Water Retentivity	%	≥ 98	99	DIN 18555-7			

## **WONDER WALLCARE PVT. LTD**

PLANT: Village & Post - Morwad, Distt. -Rajsamand, Rajasthan - 313324 CIN: U24200RJ2019PTC067368

#### **REGISTERED OFFICE:**

C/ORK Marble Private Limited, Makrana Road, Madanganj, Kishangarh, Ajmer, Rajasthan - 305801| Ph. +91 1463 277777

#### **HEAD OFFICE:**

411-413, 4th Floor, Gaurav Tower-II, Malviya Nagar Jaipur Rajasthan 302017

**%** 1800 31 31 31

✓ info@wonderwallcare.com